



Classification of Finishes

BHMA FINISH CODE	NEAREST FORMER U.S. OR BOMMER-EQUIVALENT	FINISH DESCRIPTION	BASE MATERIAL
600	US P	Primed for Painting	Steel
601	US 1B	Bright Black	Steel
632	US 3	Bright Brass Plated, Clear Coated	Steel
633	US 4	Satin Brass Plated, Clear Coated	Steel
643	US 10A / US 11	Satin Bronze Plated, Blackened, Satin Relieved, Clear Coated	Steel
652	US 26D	Satin Chromium Plated	Steel

Additional Finishes Available.

Architectural Grade and Specialty Builders Hinges

If you believe there should be a close relationship between excellence and experience, you have to feel confident about specifying Bommer hinges and specialty hardware.

Bommer Industries was around when the first double-acting spring hinge was developed in 1880. In fact, we developed it — four years after Lorenz Bommer's patented improvement on the single-acting spring hinge, and it launched our company. Bommer's ever-expanding line now includes a complete offering of architectural grade hinges, along with our comprehensive specialty lines of spring hinges, pivots and lavatory hardware.

When nothing but the best will do, specify Bommer.


SINGLE-ACTING SPRING HINGES

LB4300 SERIES

Number	Description
LB4310 - 350	Full mortise - ANSI K8107F 3 1/2" x 3 1/2" Hinge

- UL listed for fire door applications
- Non-handed
- Steel material
- Self lubricating bearings
- ANSI templated screw hole pattern
- Pivot point aligns with residential butt hinges gage .085 to .109
- Easily adjustable spring tension

Finish: 652

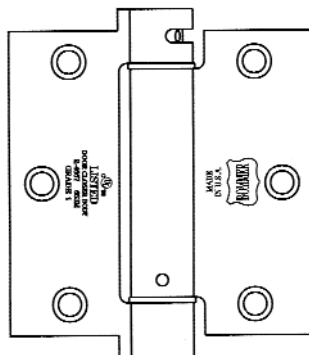


DOUBLE-ACTING SPRING HINGES

1500 SERIES — LIGHT DUTY

Number	Description
1515	Louwer door hinge: Fits louver doors 1 1/8" to 1 1/2" thick

- Non-handed
- Steel material
- Jamb flange surface-applied
- Door sizes and weights:
 - Maximum door width — 18"
 - Maximum door weight — 18 lbs.
 - Minimum door height — 42"
- Non-template
- Door flange surface-applied or mortised
- Easily adjustable spring tension

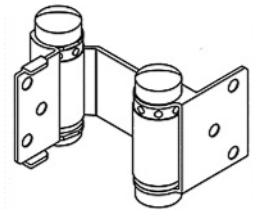

Finish: 601



Top Notch Distributors, Inc.

Serving North America

Pennsylvania
800-233-4210
Fax: 800-854-4146

Missouri
800-211-4607
Fax: 800-211-4608

Nevada
800-722-4210
Fax: 800-248-3620

Texas
866-693-6903
Fax: 866-693-6904


www.topnotch.bz • sales@topnotch.bz



Mortise/Spring Pivots Series

3029 SERIES — MORTISE 4" THROUGH 8"

Number	Two-Hinge Maximum Door Weight	Two-Hinge Maximum Door Width	Three-Hinge Maximum Door Weight	Three-Hinge Maximum Door Width	Door Thickness	Minimum Door Height
3029-4	60 lbs.	2'-4"	75 lbs.	3'-0"	7/8" to 1 1/4"	6'-8"
3029-5	65 lbs.	2'-8"	93 lbs.	3'-0"	1 1/8" to 1 1/2"	6'-8"
3029-6	75 lbs.	2'-8"	107 lbs.	3'-0"	1 1/4" to 1 3/4"	7'-0"
3029-7	82 lbs.	3'-0"	120 lbs.	3'-6"	1 3/8" to 2"	7'-0"
3029-8	103 lbs.	3'-6"	143 lbs.	4'-0"	1 1/2" to 2"	7'-0"

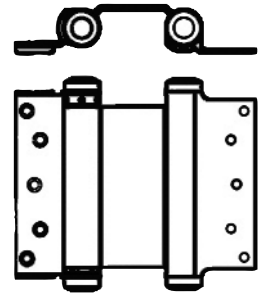


- Non-handed
- Steel material
- Jamb flange is surface-applied to jamb
- Non-template
- Door flange is mortised into edge of door
- Do not use on doors with hinge edge beveled
- All wood screws

Finishes: (4) 601, 632, 633 (5) 601, 632, 652 (6) 600, 601, 632, 633, 646, 652 (7) 632, 633 (8) 601, 652

3029 SERIES — MORTISE 6" x 4 1/2"

Number	Two-Hinge Maximum Door Weight	Two-Hinge Maximum Door Width	Three-Hinge Maximum Door Weight	Three-Hinge Maximum Door Width	Door Thickness	Minimum Door Height
3029-6 x 4 1/2	75 lbs.	2'-8"	107 lbs.	3'-0"	1 3/4"	7'-0"

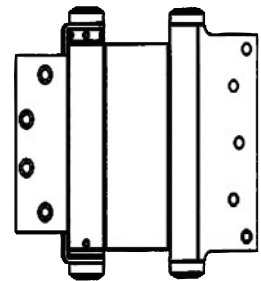

- Non-handed
- Steel material
- Jamb flange is surface-applied to jamb
- Template door leaf
- Door flange is mortised into edge of door
- Do not use on doors with hinge edge beveled
- All machine screws

Finishes: 600, 603, 652

7800 SERIES — HORIZONTAL SPRING PIVOTS

Number	Description
7801	with Floor Plate

- Non-handed
- Steel trim
- Malleable iron and steel mechanism
- Ball bearing
- Non-adjustable spring tension
- Hold open at approximately 85°
- Double acting


Finishes: 632, 633, 640, 646, 652

Number	Description
7811	with Floor Plate — Steel trim


- Non-handed
- Steel mechanism
- Ball bearing
- Adjustable spring tension
- Double acting
- Hold-open at approximately 85°-90°

Finishes: 632, 633, 638, 640, 643, 646, 652

7801

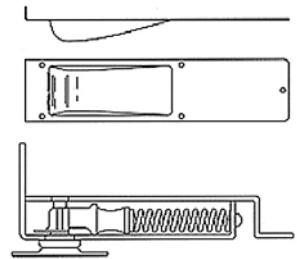

7811

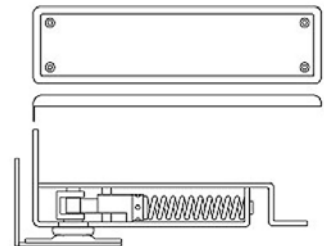

Serving North America

Pennsylvania
800-233-4210
Fax: 800-854-4146

Missouri
800-211-4607
Fax: 800-211-4608

Nevada
800-722-4210
Fax: 800-248-3620

Texas
866-693-6903
Fax: 866-693-6904