

Product Overview

Glynn-Johnson offers the widest range of door control products, designed with the needs of the hardware specifier in mind, and manufactured to the highest standards of quality and performance.

Known throughout the industry as the "Overhead Door Holder Specialist," Glynn-Johnson redesigned the complete line of **overhead holders** and **stops**, and remains the leader in quality, variety and efficiency. We offer **concealed** and **surface-mounted holders** and **stops**, in heavy-duty and medium-/light-duty units to solve the most demanding door control situations. Designed to stop or hold doors at angles from 85° to 110°, overhead holders/stops are unquestionably the most effective means of door control, protecting not only the door itself but related hardware as well.

In addition to overhead holders and stops, we offer the most complete line of **floor-mounted** and **wall-mounted stops** and **holders** in a variety of strengths, finishes and materials.

HL6 push/pull latch sets the standard for the industry. Available in stainless steel, brass, bronze, and aluminum materials in a complete variety of finishes. These units are also UL/CUL -listed for use on labeled wood and metal doors.

FINISH Classifications:

| U.S. Finishes | B.H.M.A. Finishes | Description of Finish |
|---------------|-------------------|--|
| 3 | 605 | Polished Brass |
| 4 | 606 | Satin Brass |
| 10 | 612 | Satin Bronze |
| 10B | 613 | Dark Bronze, Oxidized Satin and Oil Rubbed |
| 26 | 625 | Chromium Plated, Polished |
| 26D | 626 | Chromium Plated, Satin |
| 28 | 628 | Aluminum, Clear Anodized, Satin |
| 32 | 629 | Stainless Steel, Polished |
| 32D | 630 | Stainless Steel, Satin |
| 313AN | 710 | Aluminum Dark Bronze Anodized |
| SP10 | 691 | Bronze |
| SP4 | 706 | Brass |
| SP28 | 689 | Aluminum |
| SPBLK | 622 | Black |
| SP313 | 695 | Dark bronze |
| 652 | 652 | Chrome-like Coating on Steel |



Top Notch Distributors, Inc.

Serving North America

Pennsylvania
800-233-4210
Fax: 800-854-4146

Missouri
800-211-4607
Fax: 800-211-4608

Nevada
800-722-4210
Fax: 800-248-3620

Texas
866-693-6903
Fax: 866-693-6904

www.topnotch.bz • sales@topnotch.bz

Surface-Mounted Overhead Door Holders/Stops

GLYNN-JOHNSON®

70 SERIES


Glynn-Johnson **70 SERIES** and **79 SERIES** surface-mounted holders and stops combine rugged construction and simple installation, resulting in extremely reliable heavy-duty door control. **70** and **79 SERIES** units are constructed primarily of brass and stainless steel materials, with several components fabricated of steel material treated to resist corrosion.

Models are available in hold-open and stop-only functions, each offered in five sizes. Models include:

- **70H SERIES Hold-Open Model** — Heavy Duty
- **70S SERIES Stop-Only Model** — Heavy Duty
- **79H SERIES Hold-Open Model** — Extra Heavy Duty
- **79S SERIES Stop-Only Model** — Extra Heavy Duty

The **70 SERIES** is designed around a 1/2" diameter **300 SERIES** stainless steel bar, while the **79 SERIES** utilizes a 3/4" diameter bar, also constructed of **300 SERIES** stainless steel. Components including jamb brackets, door brackets, and hold-open/shock absorber mechanisms are a combination of brass and steel material, finished in a variety of finishes.

Finishes: **US3** (605) Polished Brass, **US4** (606) Satin Brass, **US10** (612) Satin Bronze, **US10B** (613) Oil Rubbed Bronze, **US26** (625) Polished Chrome, **US26D** (626) Satin Chrome, **SP4** (706) Brass, **SP10** (691) Bronze, **SP28** (689) Aluminum, **SP313** (695) Dark Bronze and **SPBLK** (622) Black

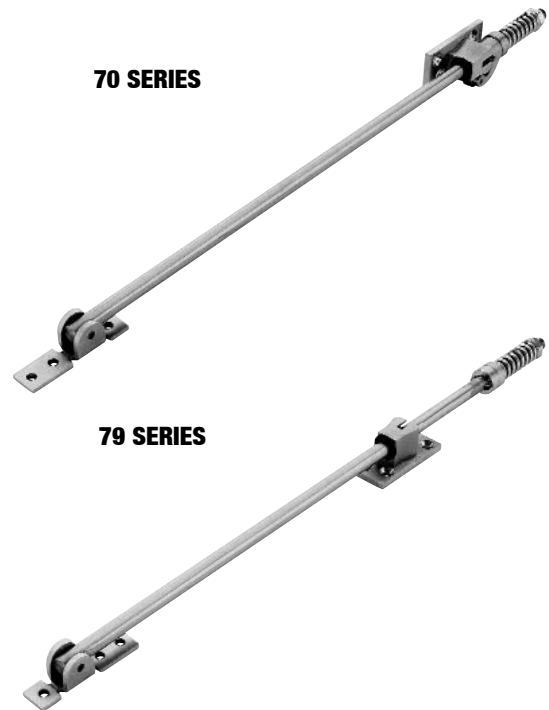

70 SERIES sizing chart

| Size | Door Opening | Butts • Offset Pivots | | Door Opening | Center Hung | |
|------|--|-----------------------|-------------|--|-------------|-------------|
| | | Stop Only | Hold Open | | Stop Only | Hold Open |
| 1 | — | — | — | — | — | — |
| 2 | 23 ¹ / ₁₆ " to 27" | 702S | 702H | 27 ¹ / ₁₆ " to 33" | 702S | 702H |
| 3 | 27 ¹ / ₁₆ " to 33" | 703S | 703H | 33 ¹ / ₁₆ " to 39" | 703S | 703H |
| 4 | 33 ¹ / ₁₆ " to 39" | 704S | 704H | 39 ¹ / ₁₆ " to 45" | 704S | 704H |
| 5 | 39 ¹ / ₁₆ " to 45" | 705S | 705H | 45 ¹ / ₁₆ " to 51" | 705S | 705H |
| 6 | 45 ¹ / ₁₆ " to 54" | 706S | 706H | 51 ¹ / ₁₆ " to 59" | 706S | 706H |

79 SERIES sizing chart

| Size | Door Opening | Butts • Offset Pivots | | Door Opening | Center Hung | |
|------|--|-----------------------|-------------|--|-------------|-------------|
| | | Stop Only | Hold Open | | Stop Only | Hold Open |
| 1 | — | — | — | — | — | — |
| 2 | 23 ¹ / ₁₆ " to 27" | 792S | 792H | 27 ¹ / ₁₆ " to 33" | 792S | 792H |
| 3 | 27 ¹ / ₁₆ " to 33" | 793S | 793H | 33 ¹ / ₁₆ " to 39" | 793S | 793H |
| 4 | 33 ¹ / ₁₆ " to 39" | 794S | 794H | 39 ¹ / ₁₆ " – 45" | 794S | 794H |
| 5 | 39 ¹ / ₁₆ " to 45" | 795S | 795H | 45 ¹ / ₁₆ " to 51" | 795S | 795H |
| 6 | 45 ¹ / ₁₆ " to 54" | 796S | 796H | 51 ¹ / ₁₆ " to 59" | 796S | 796H |



Top Notch Distributors, Inc.

Serving North America

Pennsylvania
800-233-4210
Fax: 800-854-4146

Missouri
800-211-4607
Fax: 800-211-4608

Nevada
800-722-4210
Fax: 800-248-3620

Texas
866-693-6903
Fax: 866-693-6904

www.topnotch.bz • sales@topnotch.bz

Surface-Mounted Overhead Door Holders/Stops

GLYNN-JOHNSON®



90 SERIES

Glynn-Johnson **90 SERIES** surface-mounted holders and stops provide the most versatile and attractive variety of functions, materials and finishes to fit heavy-duty applications. Models are available in **300 SERIES** stainless steel, brass/bronze, and steel materials. The broadest range of finishes in the industry is furnished to complement design requirements.

Four basic models are available, each offered in five sizes to accommodate virtually all openings. The models available include:

- **90H SERIES** — Hold-Open Model
- **90F SERIES** — Friction Hold-Open Model
- **90S SERIES** — Stop-Only Model
- **90SE SERIES** — Special Stop-Only Model

All models are available in brass/bronze, **300 SERIES** stainless steel, and steel substrates; **US3** (605), **4** (606), **10** (612), **10B** (613) finishes are furnished on a brass/bronze substrate. All new **300 SERIES** stainless steel is furnished in **US32** (629), **32D** (630) finishes, offering the highest resistance to corrosion. Steel units are available in **SP4** (706) brass, **SP10** (691) bronze, **SP28** (689) aluminum, **SP313** (695) dark bronze, **SPBLK** (622) black, and also **652** chrome like coating.

90 SERIES Sizing Chart

| Size | Butts • Offset Pivots | | | | Center Hung | | | |
|------|--|-------------|-------------|-------------|--|-------------|-------------|-------------|
| | Door Opening | Stop Only | Hold Open | Friction | Door Opening | Stop Only | Hold Open | Friction |
| 1 | — | — | — | — | — | — | — | — |
| 2 | 23 ¹ / ₁₆ " to 27" | 902S | 902H | 902F | 27 ¹ / ₁₆ " to 33" | 902S | 902H | 902F |
| 3 | 27 ¹ / ₁₆ " to 33" | 903S | 903H | 903F | 33 ¹ / ₁₆ " to 39" | 903S | 903H | 903F |
| 4 | 33 ¹ / ₁₆ " to 39" | 904S | 904H | 904F | 39 ¹ / ₁₆ " to 45" | 904S | 904H | 904F |
| 5 | 39 ¹ / ₁₆ " to 45" | 905S | 905H | 905F | 45 ¹ / ₁₆ " to 51" | 905S | 905H | 905F |
| 6 | 45 ¹ / ₁₆ " to 54" | 906S | 906H | 906F | 51 ¹ / ₁₆ " to 59" | 906S | 906H | 906F |



Serving North America

Pennsylvania
800-233-4210
Fax: 800-854-4146

Missouri
800-211-4607
Fax: 800-211-4608

Nevada
800-722-4210
Fax: 800-248-3620

Texas
866-693-6903
Fax: 866-693-6904

www.topnotch.bz • sales@topnotch.bz



100 SERIES

Glynn-Johnson **100 SERIES** concealed holders and stops provide the most attractive and reliable heavy-duty door control. The low-profile channel, constructed of heavy-gauge brass material, is mortised in the door, concealed from view. The jamb bracket is mortised in the door frame, also concealed from view when the door is in the closed position. The broadest range of finishes in the industry is furnished to complement design requirements.

Ideal for use on entrance and vestibule doors, as well as high-frequency use or large doors or doors, subject to abuse, the **100 SERIES** units provide a wide range of optional features. Three basic models are available, each offered in six sizes to accommodate virtually all openings. Models available include:

- **100H SERIES** — Hold-Open Model
- **100 HP SERIES** — Internal Hold-Open Model
- **100F SERIES** — Friction Hold-Open Model
- **100S SERIES** — Stop-Only Model
- **100SE** — Special Stop-Only Model

The above models are furnished standard with an offset style jamb bracket. The **100H SERIES** hold-open model features the most reliable hold-open mechanism which is both selective and adjustable. The unit features a control knob which turns the hold-open function on or off. The hold-open tension is simply adjustable with an Allen wrench. Set in the inactive position, the unit acts as a stop

and shock absorber. The **100S SERIES** stop-only models provide the same rugged shock-absorbing ability as the **100H** units, but are furnished less the hold-open mechanism for applications that do not require hold-open capability. The **100F** friction hold-open models provide a heavy-duty, multi-point hold-open mechanism and adjustable tension. Ideal for situations where various degrees of hold-open are required.

Functions on the standard **100 SERIES** units are interchangeable and can be converted from one function to another in the field. If, for example, a stop-only version is furnished and it is determined later that a hold-open would be more appropriate, the unit may be converted to hold-open or to a friction unit if required. Kits are available to effect these changes. The design of the **100 SERIES** will require removal of the unit from the door, in most cases, to make these conversions.

While the standard **100H SERIES** is provided with adjustable/selectable hold-open, an optional P version is provided with automatic hold-open built into the channel, reducing door preparation significantly. The standard stop-only version and friction version incorporate the low-profile channel and therefore provide reduced door prep.

An additional option on the **100 SERIES** is the “ADJ” — adjustable jamb bracket — which allows the degree of hold-open or stop angle to be adjusted after installation. This option (suffix ADJ) is available on **100H, 100S, 100F,** and **100HP SERIES** units (sizes 3, 4, 5, & 6 only).

Serving North America

Pennsylvania
800-233-4210
Fax: 800-854-4146

Missouri
800-211-4607
Fax: 800-211-4608

Nevada
800-722-4210
Fax: 800-248-3620

Texas
866-693-6903
Fax: 866-693-6904

Concealed Overhead Door Holders

GLYNN-JOHNSON®

The standard **100S SERIES** stop-only units are also available in an "SE" version, which eliminates the shock-absorbing spring, primarily for use with single-point hold-open electronic closers.

All models are available in brass/bronze and **300 SERIES** stainless steel materials. **US3** (605), **4** (606), **10** (612), and **10B** (613) finishes are furnished on a brass/bronze substrate. All new stainless steel units are furnished in **US32** (629), **32D** (630) finishes, offering the highest resistance to corrosion. Steel units are available in **SP4** (706) brass, **SP10** (691) bronze, **SP28** (689) aluminum, **SP313** (695) dark bronze and **SPBLK** (622) black.

All **100 SERIES** models are designed for heavy-duty applications and far exceed BHMA cycle test and force test requirements for Grade 1 holders and stops. Refer to sizing chart for specific model selection.

Options available:

Suffix ADJ — adjustable jamb bracket (available on sizes 3, 4, 5, & 6) — allows degree of hold-open to be adjusted after installation. Available in all functions.

Suffix CJ — closer jamb bracket provides a special jamb bracket used with LCN 5030 closers. When ordering, specified which hand. Cannot be added to an existing unit, it must be factory ordered.

Suffix SOC — pin-in-socket security screw package is a package with pin-in-socket screws for mounting jamb bracket to the frame. It is provided instead of the standard screw package.

100 SERIES sizing chart

| Size | Butts • Offset Pivots | | | Friction | Door Opening | Center Hung | | |
|------|--|--------------|--------------|--------------|--|-------------|-------------|-------------|
| | Door Opening | Stop Only | Hold Open | | | Stop Only | Hold Open | Friction |
| 1 | 18" to 23" | 101S* | 101H* | 101F* | — | — | — | — |
| 2 | 23 ¹ / ₁₆ " to 27" | 102S* | 102H* | 102F* | — | — | — | — |
| 3 | 27 ¹ / ₁₆ " to 33" | 103S | 103H | 103F | 33 ¹ / ₁₆ " to 39" | 103S | 103H | 103F |
| 4 | 33 ¹ / ₁₆ " to 39" | 104S | 104H | 104F | 39 ¹ / ₁₆ " to 45" | 104S | 104H | 104F |
| 5 | 39 ¹ / ₁₆ " to 45" | 105S | 105H | 105F | 45 ¹ / ₁₆ " to 51" | 105S | 105H | 105F |
| 6 | 45 ¹ / ₁₆ " to 54" | 106S | 106H | 106F | 51 ¹ / ₁₆ " to 59" | 106S | 106H | 106F |

* These sizes are not available for use with offset pivots. Refer to template when "ADJ" option is used to determine availability of sizes.



Serving North America


Pennsylvania
800-233-4210
Fax: 800-854-4146

Missouri
800-211-4607
Fax: 800-211-4608

Nevada
800-722-4210
Fax: 800-248-3620

Texas
866-693-6903
Fax: 866-693-6904

www.topnotch.bz • sales@topnotch.bz

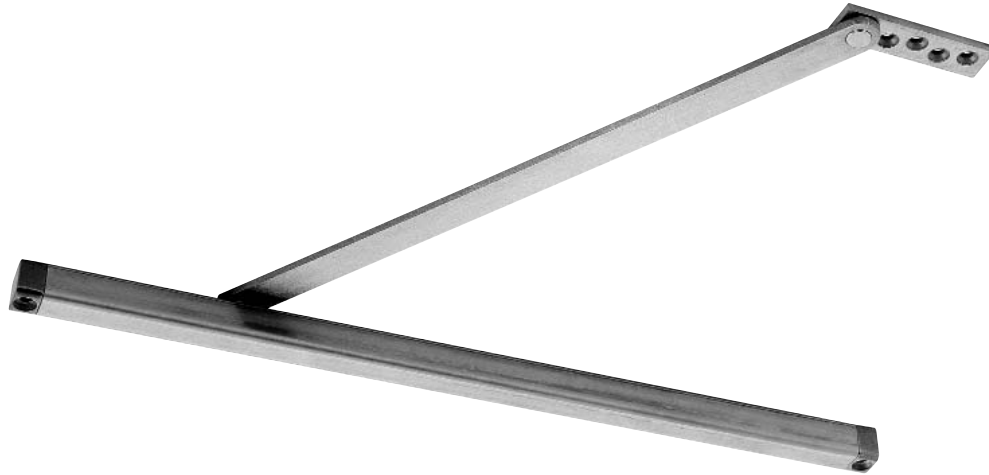

410 SERIES

Glynn-Johnson **410 SERIES** concealed holders and stops offer the widest variety of functions, base materials and finishes to fit all medium-to light duty applications. These models are available in **300 SERIES** stainless steel, brass/bronze and steel materials. The broadest range of finishes in the industry are furnished to complement design requirements.

Four basic models are available, each offered in five sizes to accommodate virtually all openings. The models available include:

- **410H SERIES** – Hold-Open Model
- **410F SERIES** – Friction Hold-Open Model
- **410S SERIES** – Stop-Only Model
- **410SE SERIES** – Special Stop-Only

All models incorporate popular channel/slide arm design and offset jamb brackets. Improved design allows for simple field changing of functions to compensate for changes in user requirements. If, for example, a hold-open model is furnished and it is determined at a later date that a stop-only model would better suit the application, a simple field change can be made to convert the hold-open unit to a stop-only function, or to friction if so required. Kits are available for simple conversion in the field.

410H SERIES hold-open models feature a rugged, automatic hold-open. The hold-open mechanism has been cycled in excess of the 250,000 cycles required for a Grade 1 holder, providing an automatic, adjustable hold open when the door reaches the template degree of hold open.

410S SERIES stop-only models offer a smooth and rugged shock absorbing mechanism designed to protect door and frame.

410F SERIES friction hold-open models provide a convenient multi-point hold-open mechanism, permitting the door to be held open at various degrees. The tension on the friction mechanism is adjustable.

410SE SERIES special stop-only models are used in conjunction with single-point, hold-open electronic door closers, the stop-only function may be ordered less the shock-absorbing mechanism. Used as an auxiliary stop, these optional models prolong the life of the closer. The stop location is adjusted using an allen wrench on the stop block located in the channel. Note: Caution should be taken when using this option in other applications, as the elimination of the shock-absorbing spring can put added stress on the door and frame.

All functions are available in brass/bronze, stainless steel, and steel substrates. **US3** (605), **4** (606), **10** (612), and **10B** (613) finishes are furnished on a brass/bronze substrate. All **300 SERIES** stainless steel material is furnished in **US32** (629) and **32D** (630) finishes, offering the highest resistance to corrosion. Steel units are available in **SP10** (bronze), **SP4** (brass), **SP28** (aluminum), **SPBLK** (black) and **SP313** (dark bronze) painted finishes, and also in **652** chrome-like coating.

Serving North America

Pennsylvania
800-233-4210
Fax: 800-854-4146

Missouri
800-211-4607
Fax: 800-211-4608

Nevada
800-722-4210
Fax: 800-248-3620

Texas
866-693-6903
Fax: 866-693-6904

Concealed Overhead Door Holders

GLYNN-JOHNSON®

All **410 SERIES** models are designed for medium to light-duty applications. They will provide long-lasting protection and door control, resulting in reduced damage to doors, door closers, hinges, and door frames.

Options Available:

Suffix SOC (Pin-in-socket security screw package) — A screw package with pin-in-socket screws for mounting the jamb bracket to the frame is provided, instead of the standard screw package.

410 SERIES sizing chart

| Size | Butts • Offset Pivots | | | Friction | Door Opening | Center Hung | | |
|------|--|-------------|-------------|-------------|--|-------------|-------------|-------------|
| | Door Opening | Stop Only | Hold Open | | | Stop Only | Hold Open | Friction |
| 1 | 18" to 23" | 411S | 411H | 411F | — | — | — | — |
| 2 | 23 ¹ / ₁₆ " to 27" | 412S | 412H | 412F | — | — | — | — |
| 3 | 27 ¹ / ₁₆ " to 33" | 413S | 413H | 413F | 33 ¹ / ₁₆ " to 39" | 413S | 413H | 413F |
| 4 | 33 ¹ / ₁₆ " to 39" | 414S | 414H | 414F | 39 ¹ / ₁₆ " to 45" | 414S | 414H | 414F |
| 5 | 39 ¹ / ₁₆ " to 45" | 415S | 415H | 415F | 45 ¹ / ₁₆ " to 51" | 415S | 415H | 415F |



Top Notch Distributors, Inc.

Serving North America


Pennsylvania
800-233-4210
Fax: 800-854-4146

Missouri
800-211-4607
Fax: 800-211-4608

Nevada
800-722-4210
Fax: 800-248-3620

Texas
866-693-6903
Fax: 866-693-6904

www.topnotch.bz • sales@topnotch.bz

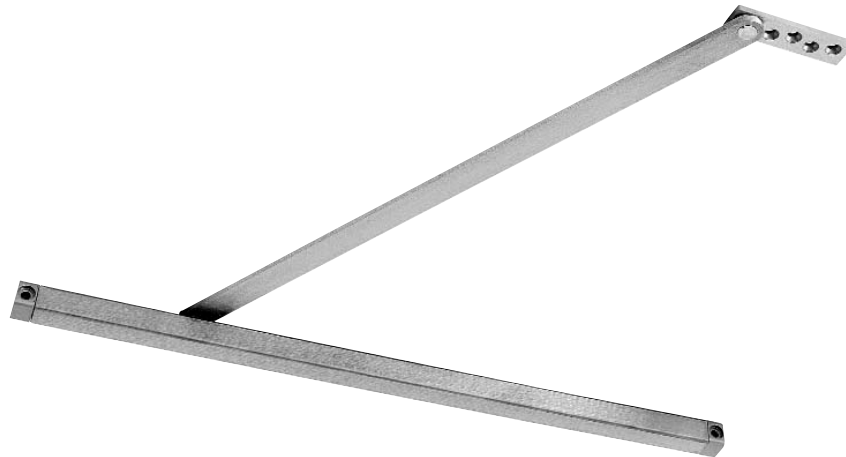

450 SERIES

Glynn-Johnson **450 SERIES** surface mounted holders and stops offer the widest variety of functions, base materials and finishes to fit all medium- to light-duty applications. These models are available in **300 SERIES** stainless steel, brass/bronze, and steel materials. The broadest range of finishes in the industry are furnished to complement design requirements.

Four basic models are available, each offered in five sizes to accommodate virtually all openings.

The models available include:

- **450H SERIES** – Hold-Open Model
- **450F SERIES** – Friction Hold-Open Model
- **450S SERIES** – Stop-Only Model
- **450SE SERIES** – Special Stop-Only Model

All functions are available in brass/bronze, stainless steel, and steel substrates. **US3** (605), **4** (606), **10** (612), and **10B** (613) finishes are furnished on a brass/bronze substrate. All new **300 SERIES** stainless steel material is furnished in **US32** (629) and **32D** (630) finishes, offering the highest resistance to corrosion. Steel units are available in **SP10** (bronze), **SP4** (brass), **SP28** (aluminum), **SPBLK** (black) and **SP313** (dark bronze) painted finishes, and also in **652** chrome-like coating.

450 SERIES sizing chart

| Size | Door Opening | Butts • Offset Pivots | | | Door Opening | Center Hung | | |
|------|--|-----------------------|-------------|-------------|--|-------------|-------------|-------------|
| | | Stop Only | Hold Open | Friction | | Stop Only | Hold Open | Friction |
| 1 | 18" to 23" | 451S | 451H | 451F | 23 ¹ / ₁₆ " to 27" | 451S | 451H | 451F |
| 2 | 23 ¹ / ₁₆ " to 27" | 452S | 452H | 452F | 27 ¹ / ₁₆ " to 33" | 452S | 452H | 452F |
| 3 | 27 ¹ / ₁₆ " to 33" | 453S | 453H | 453F | 33 ¹ / ₁₆ " to 39" | 453S | 453H | 453F |
| 4 | 33 ¹ / ₁₆ " to 39" | 454S | 454H | 454F | 39 ¹ / ₁₆ " to 45" | 454S | 454H | 454F |
| 5 | 39 ¹ / ₁₆ " to 45" | 455S | 455H | 455F | 45 ¹ / ₁₆ " to 51" | 455S | 455H | 455F |

Serving North America

Pennsylvania
800-233-4210
Fax: 800-854-4146

Missouri
800-211-4607
Fax: 800-211-4608

Nevada
800-722-4210
Fax: 800-248-3620

Texas
866-693-6903
Fax: 866-693-6904

Push/Pull Latch

HL-6 Push/Pull Latches for installations where both versatility and durability are critical. Ideal for use on commercial and institutional doors, including fire doors. Functional and modern in design, these units can be mounted in any of six different positions and are available in 2³/₄", 3³/₄", 5", or 7" backset. The short throw angle allows an easy push or pull action to open the door even when hands are not free.

Base Metals: Brass, Bronze, Stainless Steel, Aluminum.


Finishes: **26D** finishes furnished on an aluminum base material for both escutcheons and levers. **US3, 4, 10, 10B, 26** finishes furnished on a brass or bronze base material for levers and escutcheons.

Brass and bronze base units provide attractive finishes while maintaining all features of aluminum unit. Brass base unit can also be supplied when **26D** finish is supplied (suffix B) in place of standard aluminum material.


HL-6 Push/Pull Latches are now available with durable **300 SERIES** stainless steel handles and covers. Handles are investment cast and covers are drawn stainless steel. Available in **US32** and **32D** finishes.

Options Include:

- Lead lining (suffix L).
- Engraved ("Push"/"Pull") handles (suffix E).
- Exit-only version (suffix EO).
- Roller Latch Conversion Kit — Unit is provided with strike and latch adapter to allow conversion with minimal door preparation changes (suffix RL).
- Entrance only (suffix EN).
- Pin-in-socket security screws (suffix SOC).

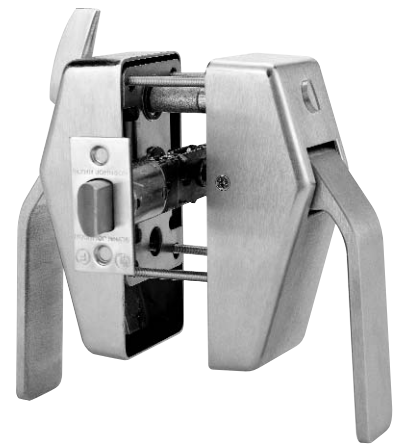

Mounting Positions for Standard HL6

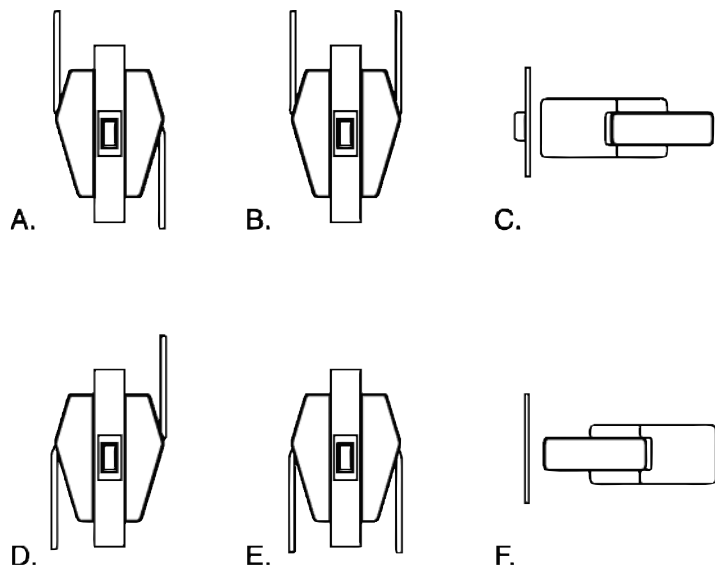

Serving North America

Pennsylvania
800-233-4210
Fax: 800-854-4146

Missouri
800-211-4607
Fax: 800-211-4608

Nevada
800-722-4210
Fax: 800-248-3620

Texas
866-693-6903
Fax: 866-693-6904

Push/Pull Latch

GLYNN-JOHNSON®

HL-6 MORTISE LOCK

The **HL6** push/pull design is now available with a mortise lock. Designed to combine with the Schlage L Series heavy-duty mortise lock, it combines all the functions and features of the Schlage **L Series** with the popular **HL6** push/pull paddle operation and versatile mounting positions.

Units are furnished complete with Schlage lockset (less cylinders) and all necessary fasteners. All units are furnished in 2³/₄" backset and are available in **US3, 10, 26D** and **32D** finishes. Paddles, covers, and chassis are of the same design and construction as standard Glynn-Johnson **LH6** unit.

Options:


- B — Brass base material for **26** and **26D** finishes.
- E — Engraved handles — "Push", "Pull." Advise position of handles if vertical; handing of door if horizontal mounting is used.
- EN — Entrance-only latch.
- EO — Exit-only latch.
- L — Lead lining.
- RL — Roller latch conversion kit.
- SOC — Pin-in-socket security screws.

Specify as follows:

HL6 — desired Schlage lock function-finish.

Example:

HL6 — 9070 (classroom)-US32D (furnished-less cylinders).

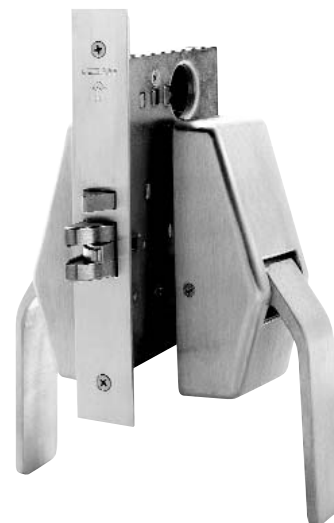

Serving North America

Pennsylvania
800-233-4210
Fax: 800-854-4146

Missouri
800-211-4607
Fax: 800-211-4608

Nevada
800-722-4210
Fax: 800-248-3620

Texas
866-693-6903
Fax: 866-693-6904