

# Products Are Made To Order 170A Saddle Thresholds




Meets requirements of ADAAG-1992, CABO/ANSI A117.1, 1992 and title 24, CAC SEC 2 — 3303(i).

Products are voluntarily submitted to rigid third-party testing and follow-up audits to confirm that they fully and continuously meet or exceed the requirements of their underlying ANSI/BHMA standards.

Tested to UL1784, 1990, meets requirements of NFPA, 105 — 99. Smoke tested.

Classified and listed to meet the requirements of standards UL10B, UL10C & UBC7 — 2, Part 1.

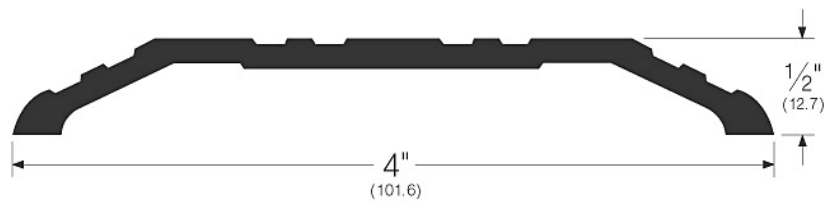


## 205AV BUMPER THRESHOLDS FOR OUTSWING DOORS

In closed position, the door butts up to vinyl bumper on threshold creating a high dam barrier seal from the elements.

Air infiltration tested in accordance with ASTM E 283, 1984 and SDI 116.

Meet requirements of ASTM E — 152 and UBC — 432.

Products are listed as gasket material for use on listed steel frames and classified hollow metal steel composite type fire doors rated up to and including three hours. Wood composite type fire doors rated up to and including one and a half hours and wood core fire doors rated twenty minutes without hose stream.

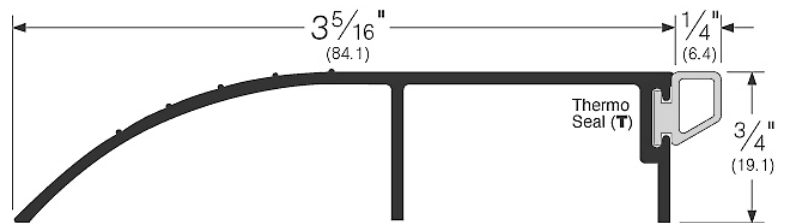

## S88 SILICONSEAL ADHESIVE-BACKED FIRE/SMOKE GASKETING

Extruded from high-temperature silicone — effective between -100 degree F and 650 degree F.


Seals begin compressing at 1/4" and can all be compressed sufficiently to seal openings with 1/16" gaps, making door latching easy.

Impervious to fungus and mildew; will not deteriorate under normal exposure.

Smoke tested by Wyle laboratories in accordance with UL 1784 — 90; meets the requirements of NFPA 105 "installation of smoke control door assemblies."

Meets FAR 25.853 Airworthiness Standards for Compartment Interiors.

AIR INFILTRATION TESTED IN ACCORDANCE WITH ASTM E 283, 1984 AND SDI 116. AIR INFILTRATION IS ONLY -09 CFM/FT OF CRACK (500% BETTER THAN -50 CFM/FT OF CRACK ALLOWED BY ASTM 283 AND SDI 116).

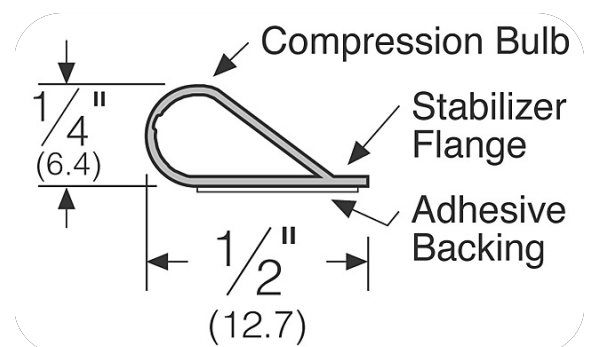

## SIMILAR PRODUCTS AVAILABLE IN NATIONAL GUARD AND REESE.



Top Notch Distributors, Inc.

### Serving North America

**Pennsylvania**  
800-233-4210  
Fax: 800-854-4146

**Missouri**  
800-211-4607  
Fax: 800-211-4608

**Nevada**  
800-722-4210  
Fax: 800-248-3620

**Texas**  
866-693-6903  
Fax: 866-693-6904

www.topnotch.bz • sales@topnotch.bz

# Notes

---



Top Notch Distributors, Inc.

---

## Serving North America

**Pennsylvania**  
800-233-4210  
Fax: 800-854-4146

**Missouri**  
800-211-4607  
Fax: 800-211-4608

**Nevada**  
800-722-4210  
Fax: 800-248-3620

**Texas**  
866-693-6903  
Fax: 866-693-6904

[www.topnotch.bz](http://www.topnotch.bz) • [sales@topnotch.bz](mailto:sales@topnotch.bz)